


# Bảng thông số sản phẩm

Thông số kỹ thuật

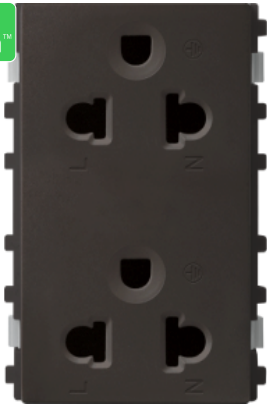

## Zencelo - 250V 16A Twin 3 Pin UNI 3M sized SKT

84426LUES2\_BZ\_G19

### Main

Range	ZENcelo
Product or component type	Power socket-outlet
Outlet poles configuration	2P + E universal
Load type	Inductive Resistive
Cover plate colour tint	Bronze

### Complementary

Device mounting	Flush Surface
Rated current	16 A at 250 V AC 50 Hz
Number of gangs	2 gangs
Marking	L+N
Material	Polycarbonate base Polycarbonate cover
Connections - terminals	Screw terminals
Width	46 mm
Height	70.1 mm
Depth	30.5 mm

### Environment

Ambient air temperature for operation	-5...40 °C
Ambient air temperature for storage	0...60 °C
Relative humidity	0...95 %, non-condensing (storage) 10...95 %, non-condensing (operating)
Environmental characteristic	UV resistant indoor use
Operating altitude	2000 m
IP degree of protection	IP20
Product certifications	TISI
Standards	IEC 60364 IEC 60884-1

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

Thay thế được đề xuất